



Installation Guides

Creating an Anti-Slip Surface with Liquid PU

We offer a range of roofing and building solutions to tradesmen, stockists, and directly to consumers. Long term solutions to age old problems. Partnering with some of the biggest names in the industry, we have a long history of quality and excellence.



 www.permarroof.co.uk

 sales@permароof.co.uk

 01773 608839

Permaroof500 Liquid Rubber

Creating an Anti-slip Surface



Anti-slip finishes can be applied directly onto the topcoat UV layer while it is still wet. This guide is here to show you how. Please refer to the application guide for Permaroof500 liquid waterproofing topcoat UV layer.

The liquid synthetic rubber waterproofing system is applied layer by layer. Before the topcoat UV or anti-slip coating is applied, the detailed work and the main surface layers must be actioned.


For a full installation guide for the entire Permaroof500 liquid membrane system, please visit:

permaroof.co.uk/diy-flat-roof-library



Depending upon the design level required, silica sand, mineral clippings or other suitable anti-slip finishes can be added.

Make sure you add the anti-slip medium to the edges of the area.

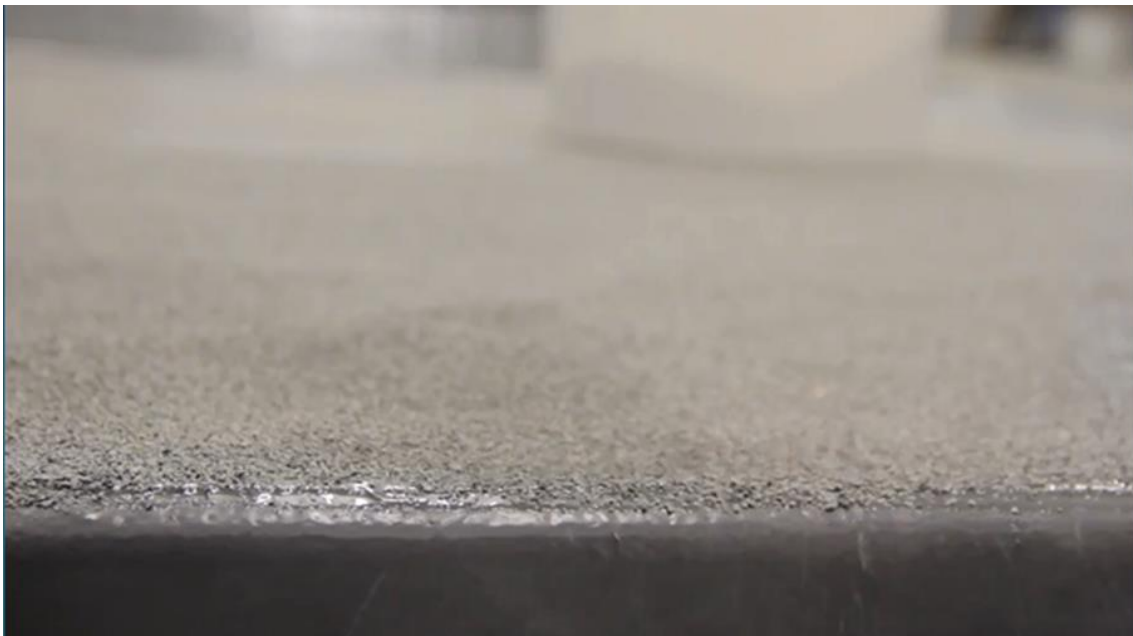

Allow the topcoat to dry before sweeping off loose chippings. Masking tape must be removed immediately after the anti-skid has been applied.



For a finer, encapsulated anti-skid, you can add PermaPlastic to the mixed topcoat UV at a 10-50% ratio before application.



Mix thoroughly at medium speed and ensure the product is well-blended. This plastic bead does not sink to the bottom of the mixed tin or container.



When applying the Permaroof500 topcoat UV combined with PermaPlastic with a roller, it leaves a finer anti-skid encapsulated in the surface area.



This is ideal for balcony areas or swimming pool patios where people will be walking barefoot.



Allow to fully dry and cure before walking on the surface.

For commercial or heavy use, such as in a car park, public park area or in areas with steps, the creation of anti-skid and anti-slip surfaces is simplified with the use of Permaroof500 Liquid rubber.

The professional teams at Permaroof are available to offer advice and recommend the best anti-skid mediums for individual commercial projects. Contact the teams on 01773 608 839 or email us at sales@permaroof.co.uk.

Permaroof UK Ltd

01773 608 839

permaroof.co.uk

Shop online

permaroofstore.co.uk

EPDM roofing training:

permaroof.co.uk/roofing-training-courses

Further EPDM resources:

permaroof.co.uk/diy-flat-roof-library

Visit our YouTube channel for tutorials:

youtube.com/user/PermaroofOnline/videos