



# Application Guides

## P500 Liquid PU Roofing: Main Area Application

We offer a range of roofing and building solutions to tradesmen, stockists, and directly to consumers. Long term solutions to age old problems. Partnering with some of the biggest names in the industry, we have a long history of quality and excellence.



 [www.permarroof.co.uk](http://www.permarroof.co.uk)

 [sales@permароof.co.uk](mailto:sales@permароof.co.uk)

 01773 608839

# P500 Liquid PU Roofing Guides

## Permaroof500 Liquid Rubber: Main Area Application



In this application tutorial we're going to show you how to apply the Permaroof500 Liquid waterproofing system to the main area of your roofing project.

**Note: detailed application should be carried out first to ensure a successful project.**

Please refer to our other P500 liquid rubber application guides for information about detailed application, UV topcoat and the creation of anti-skid surfaces.

Visit the Permaroof resource library at:

[permaroof.co.uk/diy-flat-roof-library](http://permaroof.co.uk/diy-flat-roof-library)



Accelerated Permaroof500 can be applied to the main surface in one or more layers using a 9-inch, solvent-resistant roller. Each layer must be fully cured before applying the next.



Work in sections as shown when applying the matting to the surface area. As before, during the detailed application stage, dry roll the product through.



And add another layer of the Permaroof500 liquid rubber product to embed the matting.



(Refer to the P500 detailed application guide in the resource library).



And add another layer of the Permaroof500 liquid PU to embed the matting.



Make sure the Permaroof500 liquid PU is worked right to the edges of the area.



As it is naturally self-levelling, the Permaroof500 liquid rubber system does not need to be over-worked, and it provides more control over the thickness.



The system needs to be a minimum of 1.4mm thick, or a coverage rate of 2kg/m<sup>2</sup>




Accelerated Permaroof500 will be touch-dry in approximately 40-50 minutes and ready for topcoat in a couple of hours.

The P500 liquid roof system can be complemented with our unique Permaroof trim system, giving your roof a professional, neat-looking finish.



Full details on how the trim is installed is covered in our training course.

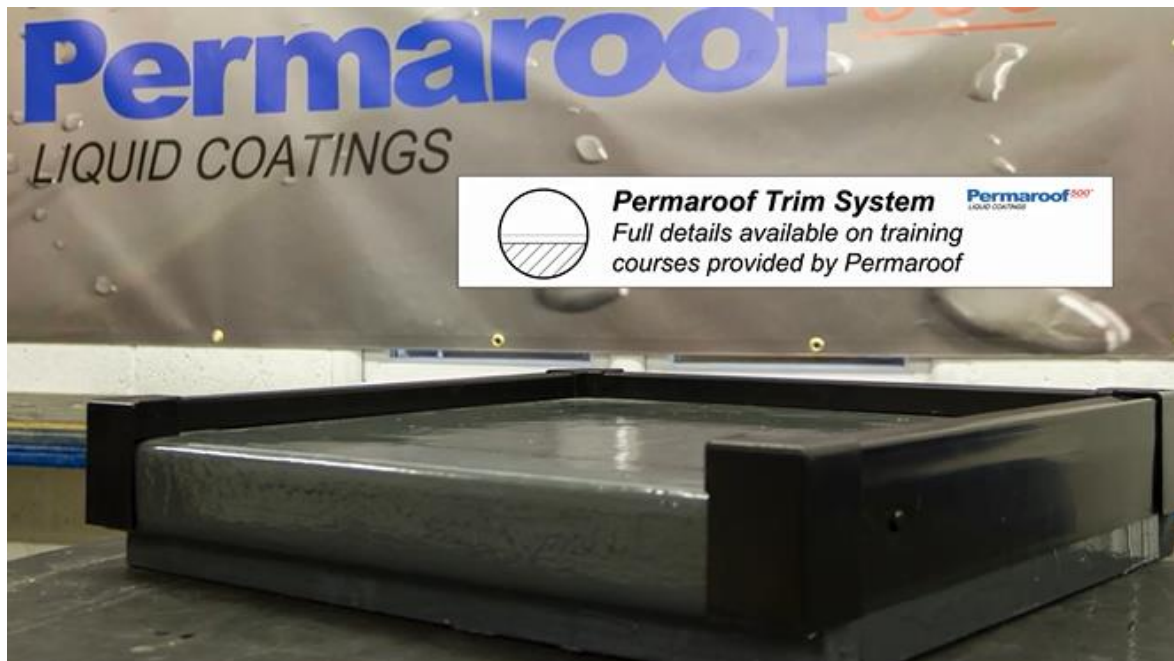

Find out more about Permaroof Liquid training at:

[permaroof.co.uk/roofing-training-courses](https://permaroof.co.uk/roofing-training-courses)

Buy the P500 waterproofing system online at:

[permaroofstore.co.uk/liquid-roofing](https://permaroofstore.co.uk/liquid-roofing)



## Permaroof UK Ltd

01773 608 839

[permaroof.co.uk](http://permaroof.co.uk)

## Shop online

[permaroofstore.co.uk](http://permaroofstore.co.uk)

## EPDM roofing training:

[permaroof.co.uk/roofing-training-courses](http://permaroof.co.uk/roofing-training-courses)

## Further EPDM resources:

[permaroof.co.uk/diy-flat-roof-library](http://permaroof.co.uk/diy-flat-roof-library)

## Visit our YouTube channel for tutorials:

[youtube.com/user/PermaroofOnline/videos](https://youtube.com/user/PermaroofOnline/videos)